

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
WO 2004/026678 A1

(51) International Patent Classification<sup>7</sup>: B63B 35/79

(21) International Application Number:  
PCT/EP2003/010198

(22) International Filing Date:  
12 September 2003 (12.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
M12002A001970  
17 September 2002 (17.09.2002) IT

(71) Applicant (for all designated States except US): PO-  
LITECNICO DI MILANO [IT/IT]; Piazza Leonardo da  
Vinci, 32, I-20133 Milano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PERALE,  
Giuseppe [IT/IT]; Via Bezzacca, 1, I-20134 Milano  
(IT). TEDESCO, Alessandro [IT/IT]; Via B. Zulian, 8,  
I-30100 Lido di Venezia (IT).

(74) Agent: MITTLER, Enrico; Mittler & C. S.r.l., Viale  
Lombardia, 20, I-20131 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**


- as to the applicant's entitlement to claim the priority of the  
earlier application (Rule 4.17(iii)) for the following design-  
nation US
- of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: HARNESS SUITABLE FOR USE ON WATERCRAFT

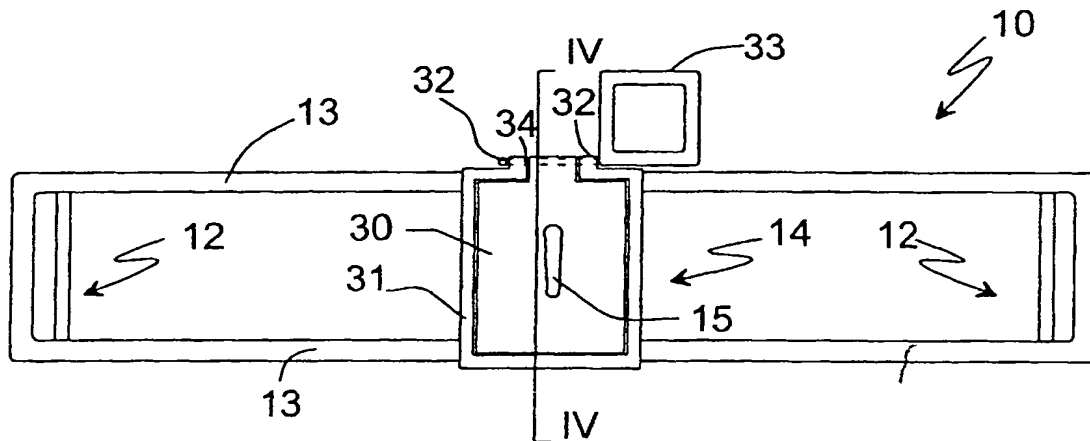

(57) Abstract: The present invention refers to a harness, in particular the trapezoidal type, suitable for use on watercraft such as yacht or windsurf. More specifically it refers to a safety system of the harness. In one embodiment thereof the harness suitable for use on watercraft comprises: a basic element (10) coupled to said harness; a hook (15), suitable for being hooked by a cable, coupled to said basic element (10); characterised in that said basic element (10) comprises a first piece (31) connected to said harness and of a second piece (30, 15), that can be disconnected from said first piece (31); said first piece (31) is coupled to said second piece (30, 15) by means of coupling means (32) that can be slipped out.

ATTACHMENT A

WO 2004/026678 A1

"Harness suitable for use on watercraft"

\* \* \* \*

#### DESCRIPTION

5 The present invention refers to a harness, in particular of the trapezoidal type, suitable for use on watercraft such as yachts or windsurfs. More specifically it refers to a safety system of the harness.

10 When the boat leans over on one side because of the wind or the speed that has to be kept, it is usual for the sailors to lean over the side of the boat to compensate the inclination using their own weight. The trapezoidal type of harnesses are used, which can be connected to cables connected to the mast of the boat, to allow the sailors to lean over as much as possible without falling into the water.

15 It can happen though that in the event of danger, for example if the boat capsizes, it is difficult if not impossible to unhook the cable of the harness sometimes resulting in disastrous consequences for the sailors.

In view of the state of the technique described, the object of the present invention is to provide a safety system for unhooking the harness from the cable.

20 In accordance with the present invention, this object is achieved by means of a harness suitable for use on watercraft comprising: a basic element coupled to said harness; a hook, suitable for being hooked up by a cable, coupled to said basic element; characterised in that said basic element comprises a first piece connected to said harness and by a second piece, that can be disconnected from said first piece; said first piece is coupled to said  
25 second piece by means of coupling means that can be slipped out. Thanks to the present invention a safety system can be made for unhooking the harness from the cable and which can be installed on all models of the trapezoidal type of harness without making any modifications but only replacing the hooking plate. Further, this system results of easily realisation and it is at  
30 low cost because comprises simple mechanical parts of which one

disconnectable from the harness in case of necessity.

The characteristics and advantages of the present invention will appear evident from the following detailed description of some of its embodiments, illustrated as non-limiting examples in the enclosed drawings, in which:

5        Figure 1 represents a plate for hooking the cable of a trapezoidal harness in accordance with the known art;

Figure 2 represents a section of Figure 1 according to line II-II;

Figure 3 represents a plate for hooking the cable of a trapezoidal harness, in the closed position, in accordance with a first embodiment of the  
10        present invention;

Figure 4 represents a section of Figure 3 according to line IV-IV, in the open position;

Figure 5 represents a hooking plate seen from above the cable of a trapezoidal harness, in the closed position, in accordance with a first  
15        embodiment of the present invention;

Figure 6 represents a plate for hooking the cable of a trapezoidal harness, in the closed position, in accordance with a second embodiment of the present invention;

Figure 7 represents a plate for hooking the cable of a trapezoidal harness, in the closed position, in accordance with a third embodiment of the  
20        present invention;

Figure 8 represents a plate for hooking the cable of a trapezoidal harness, in the closed position, in accordance with a fourth embodiment of the present invention;

25        Figure 9 represents a plate for hooking the cable of a trapezoidal harness, in the closed position, in accordance with a fifth embodiment of the present invention, with a partial view of the harness;

Figure 10 represents a plate for hooking the cable of a harness, in the closed position, in accordance with a sixth embodiment of the present  
30        invention, with a partial view of the harness.

We now refer to Figure 1, in which a hooking plate 10 of the cable of a trapezoidal harness is shown in accordance with the known art, and to Figure 2, which represents a section of Figure 1 according to line II-II.

The hooking plate 10, normally constituted by a tubular metal structure 13 of a rectangular shape, comprises suitable means 12 and 13 for fastening it, by means of suitable belts (not shown) to the harness (not shown) that will be worn by the sailor.

A plate 14, onto which a hook 15 is welded, is welded at the centre of the hooking plate 10. A ring of a cable (not shown) fastened onto the mast of the boat will be hooked onto the hook 15.

We now refer to Figure 3, in which a hooking plate 10 of the cable of a trapezoidal harness is shown, in the closed position, in accordance with a first embodiment of the present invention.

In Figure 3 elements similar to the elements of Figure 1 have the same numerical reference.

The plate 14 comprises in this case a first plate 31 fastened onto the tubular metal structure 13 for example by means of welding. A second plate 30, on which the hook 15 is fastened, is engaged with the first plate 31. They are fastened to each other so that they can be slipped out, by means of a pin 32 that comprises a ring 33, to facilitate its removal, positioned in a hole 34 made in the upper part both of the plate 31 and of the plate 30.

We now refer to Figure 4 that represents a section of Figure 3 according to line IV-IV, in the open position, and to Figure 5 that represents a hooking plate seen from above the cable of a trapezoidal harness, in the closed position, in accordance with a first embodiment of the present invention.

The plate 31, in its lower part, in corrispondance with reference 36 has a U-shaped tooth in which the plate 30 (preferably with the internal corner rounded-off) is rested.

In the upper part, the plate 31 has a central cavity 50 in which a portion 51 of the plate 30 can lie. In other words, the plate 31 in the upper part has

two side portions with a greater thickness compared to the other parts, thus forming a central hollow, and the plate 30 has in the upper part a vertical central protrusion that can fit into the hollow of the plate 31.

5 In this manner, when the plates 30 and 31 are brought closer together, the hole 34 on the plate 30 and on the plate 31 are aligned and the locking pin 32 can be inserted.

Preferably, the dimensions of these parts of the structure have a dimension which is sufficient for the hole 34 to be made so that the pin 32 can be inserted.

10 A spring 35 is preferably positioned between the plate 31 and the plate 30, and a housing 37 and 38 of the spring 35 is preferably made in both plates.

With plates closed, the pin 32 on one side and the tooth in position 36 block the plate 30 against the plate 31.

15 In the event the harness has to be unhooked the pin 32 is pulled out by pulling the ring 33 from the side, the plate 30 is pushed out by the action of the spring 35 that frees itself from the plate 31, thus freeing the cable fastened to the hook 15 by the harness worn by the sailor.

20 The type of material preferred for the system described above is high corrosion resistant stainless steel (for example INOX18/10, or AISI 316L), given its use in the presence of saltwater.

25 The maximum load that can be applied to the hook will be equal to the weight of the athlete, shall we say a maximum of 100kg (about 1kN). This is a negligible load for a steel structure of preferably 7 mm. A shear force of 1kN, on a circular steel structure of 7mm in diameter leads to a maximum internal stress of about 26Mpa, low compared to the critical value of almost 1Gpa for steel.

30 In regard to the stress to be made on the ring 33 for unhooking, the following theories can be formulated. The load applied to the hook is distributed entirely on the contact of the pin. A linear contact between the

locking pin and guide is made. The coefficient of static friction to the steel-steel contact is equal to 0.2. Thus the force to be applied to slip the pin out in this case will be equal to about 200N (about 20kg-force); normally an athlete can develop much greater traction forces with the should-arm muscle group, and thus the pin can be slipped out without problems.

The locking pin 32 and the hole 34 have such a dimension that the pin 32 presents slight friction with the hole 34, so that it cannot come out unless it is purposely extracted by means of the ring 33. Preferably, at the end opposite the ring 33, the pin 32 can be fitted with a fine lead wire, also with a lead seal, that places minimum resistance to the pin coming out, but which prevents the pin 32 from accidentally coming out of its housing.

In figures 6, 7 and 8 plates for hooking the cable of a trapezoidal harness are shown, in the closed position, in accordance with different embodiments.

In Figure 6 the ring 33, connected to the pin 32, has been replaced by a cable 60 that slides in a tubular guide 61, comes out of it and ends fastened to a flying handle 70.

In Figure 7 the pin 32 is connected to a rigid slug 62 that slides in a tubular guide 61 and is fastened to a handle 71, suitable positioned on the tubular metal structure 13.

In Figure 8, in relation to Figure 7, there is another tubular guide 63 to permit the handle 72 to slide smoother.

In Figure 9, similarly to Figure 6, the pin 32 is connected to a cable 60 that slides in a flexible tubular guide 93, fastened to a flying handle 73, inserted in a pocket 90, preferably provided with Velcro to prevent it from coming out accidentally. In Figure 9 a partial view of the harness 91 is also shown with some belts 92 that fasten the hooking plate 10 to the harness itself.

Figure 10 shows a type of harness 94 that is slightly different from the harness 91 of Figure 9, being the type typically used for windsurf.

Instead of the tubular metal structure 13, in this case, there is a plate 95 fastened to the fabric of the harness 94 below. The plate 14 is fastened onto the plate 95. On the plate 95 there are also, on the side of the plate 14, two rows of holes 96 that serve to fasten the plate 95 onto the fabric of the harness 94. The holes 96 in combination with the holes 97, positioned on the harness 94, also serve to close the harness 94 itself by means of a cord.

Several embodiments of the present invention have been described, but others are also possible. All the embodiments described up to this point have the closing pin 32 positioned in the upper part and the tooth in position 36 positioned lower, but alternatively they could be inverted. That is, use the hooking plates 10 upside down in relation to the Figures.

Alternatively the plate 30 and the plate 31 could be hooked only by means of the pin 32 without using the tooth on the plate 31 in position 36, possible suitably positioning the hook 15 and the pin 32 on the plates 30 and 31.

In addition the hollow portion 50 could be more than one and also the portion 51 of the plate 30.

In alternative, to lighten the weight, a structure, preferably full of composite material, for example of carbon, Kevlar and epoxy resins can be used as tubular metal structure 13. The plate 30 and the pin 32 could still be constituted of steel.

## CLAIMS

1. Harness suitable for use on watercraft comprising:  
a basic element (10) coupled to said harness;  
a hook (15), suitable for being hooked by a cable, coupled to said basic  
5 element (10);  
characterised in that  
said basic element (10) comprises a first piece (31) connected to said  
harness and of a second piece (30, 15), that can be disconnected from said  
first piece (31);  
10 said first piece (31) is coupled to said second piece (30, 15) by  
means of coupling means (32) that can be slipped out.
2. Harness in accordance with any of the previous claims  
characterised in that said first piece (31) and said second piece (30, 15) are  
constituted of plates.
- 15 3. Harness in accordance with any of the previous claims  
characterised in that said first piece (31) presents at least a hollow portion  
(50) in which at least one portion (51) of said second piece (30, 15) can be  
placed.
4. Harness in accordance with any of the previous claims  
20 characterised in that said first piece (31) and said second piece (30, 15)  
present transversally a through hole (34) in which said hooking means (32)  
can be inserted.
5. Harness in accordance with claim 4 characterised in that said  
hooking means (32) consist of a pin that can be slipped out.
- 25 6. Harness in accordance with claim 5 characterised in that said pin  
that can be slipped out (32) is coupled to a handle (33, 70, 71, 72).
7. Harness in accordance with claim 5 characterised in that it  
comprises at least one guide track (61, 63) for slipping out said pin (32).
8. Harness in accordance with any of the previous claims  
30 characterised in that said hooking means (32) that can be slipped out are



positioned in the upper part of first piece (31) and of said second piece (30, 15).

5           9.    Harness in accordance with any of the previous claims characterised in that between said first piece (31) and said second piece (30, 15) a spring (35) is positioned.

          10.   Harness in accordance with any of the previous claims characterised in that said first piece (31) presents a tooth to which said second piece (30, 15) is engaged.

10           11.   Harness in accordance with claim 10 characterised in that said tooth is positioned in the lower part of said first piece (31).

          12.   Harness in accordance with any of the previous claims characterised in that said second piece (30) comprises said hook (15).

15           13.   Harness in accordance with claim 12 characterised in that said hook (15), said first piece (31) and said second piece (30, 15) are made of steel.

          14.   Harness in accordance with any of the previous claims characterised in that said harness is the trapezoidal type.

1/3

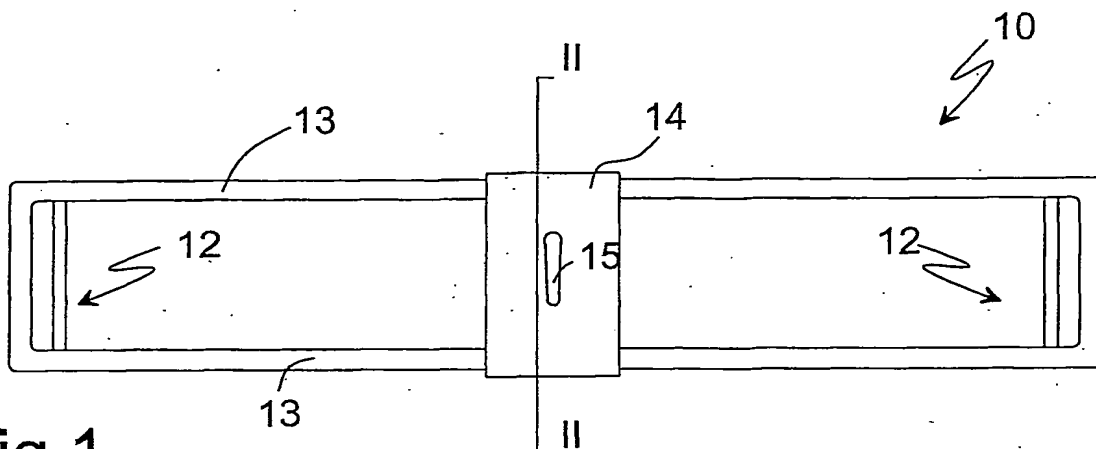


Fig. 1

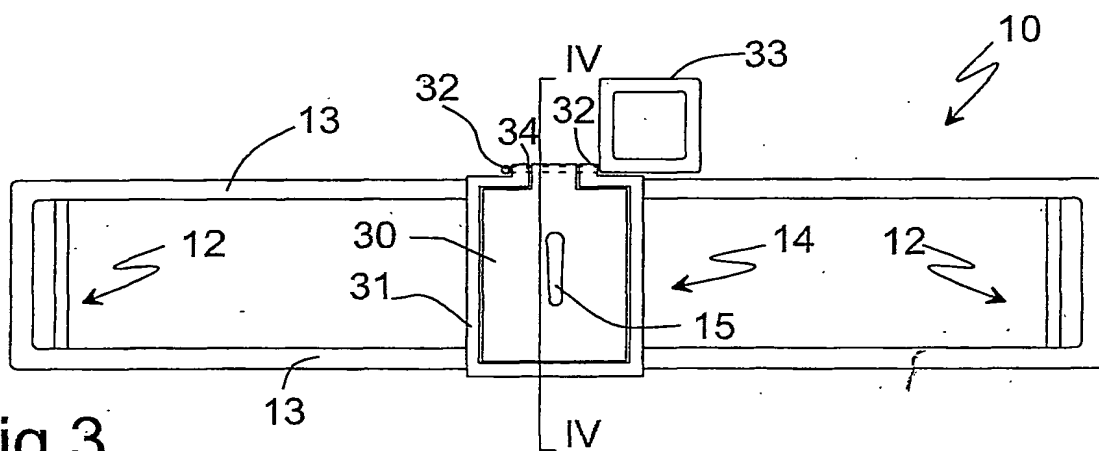


Fig. 3

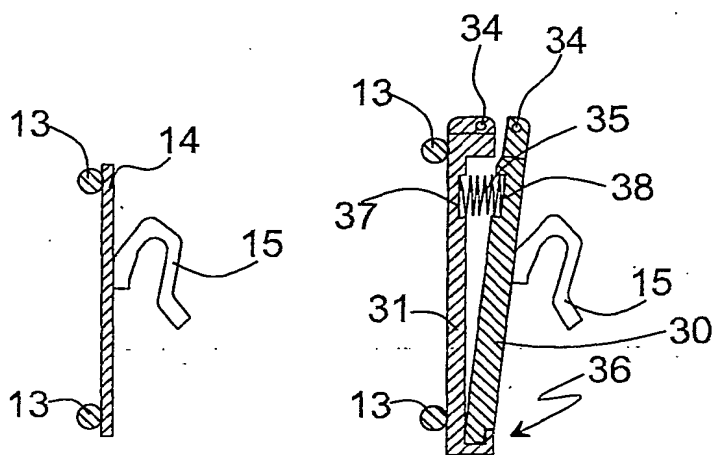


Fig. 2

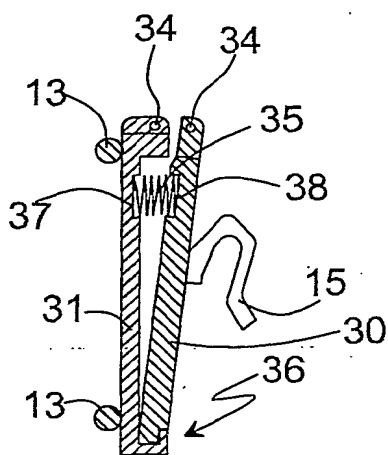


Fig. 4

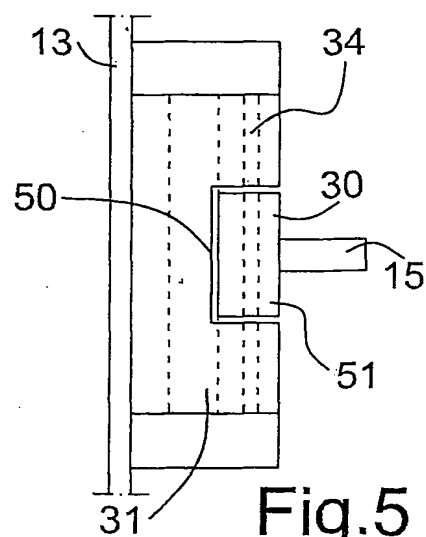


Fig. 5

2/3

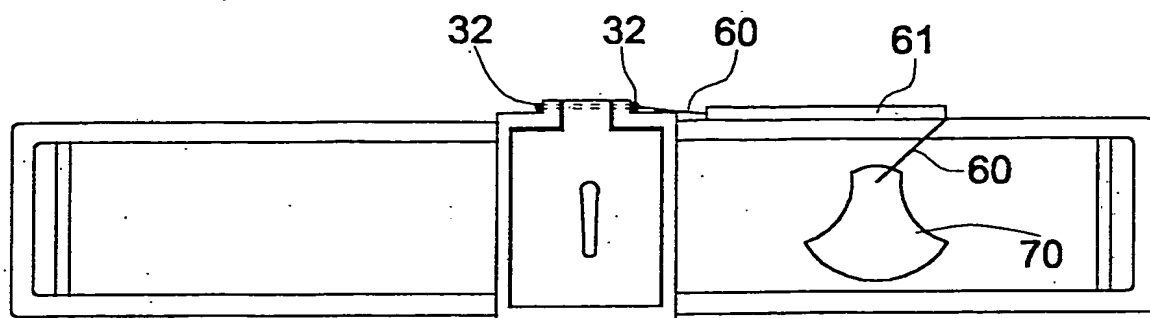


Fig.6

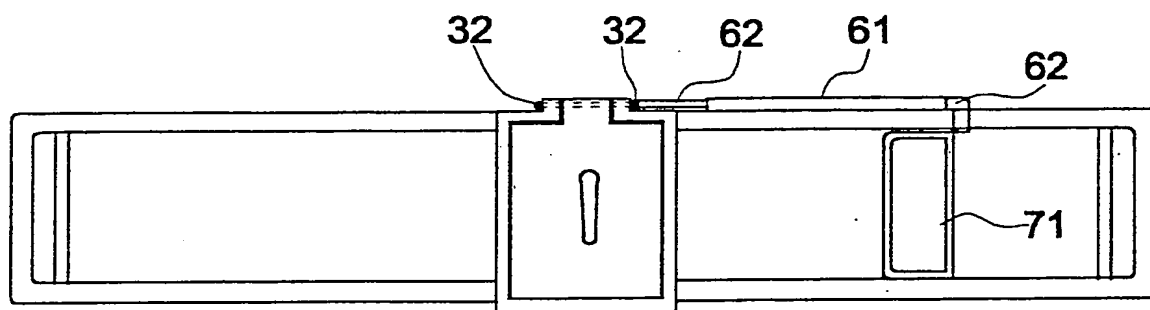


Fig.7

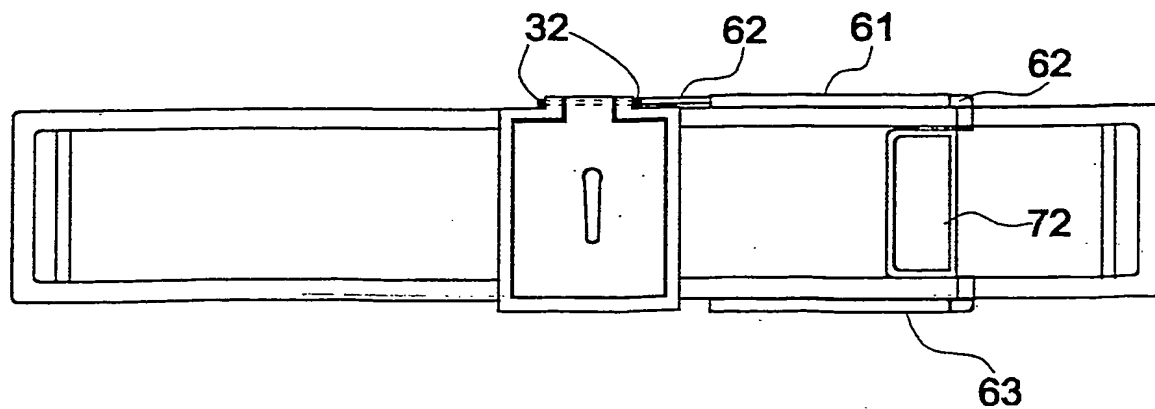


Fig.8

3/3

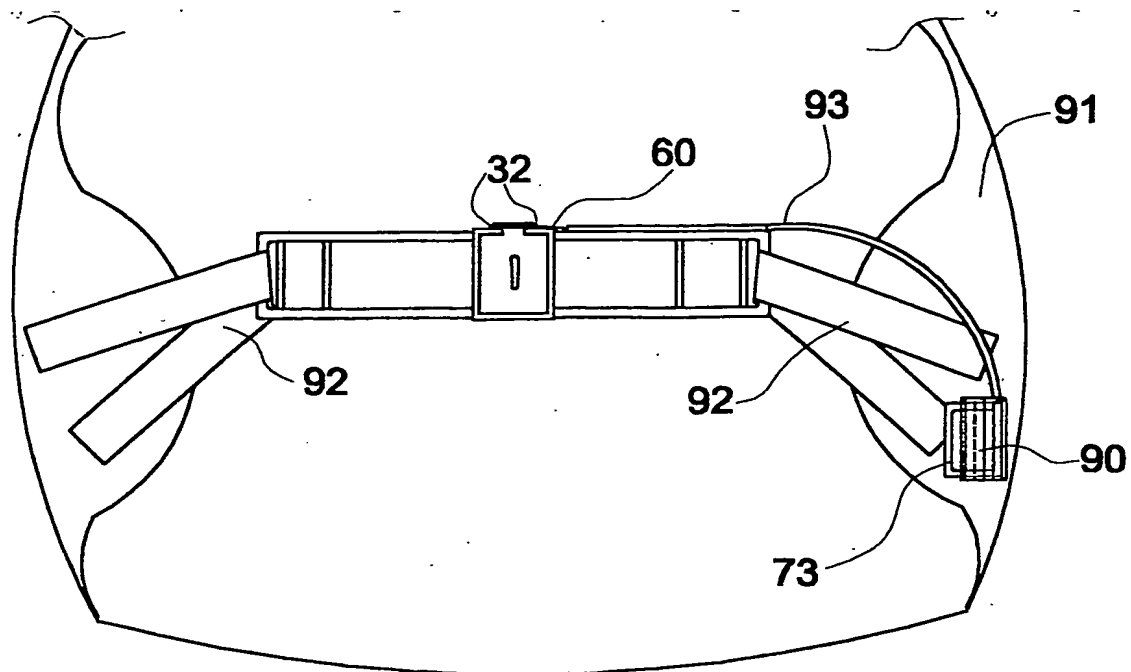


Fig.9

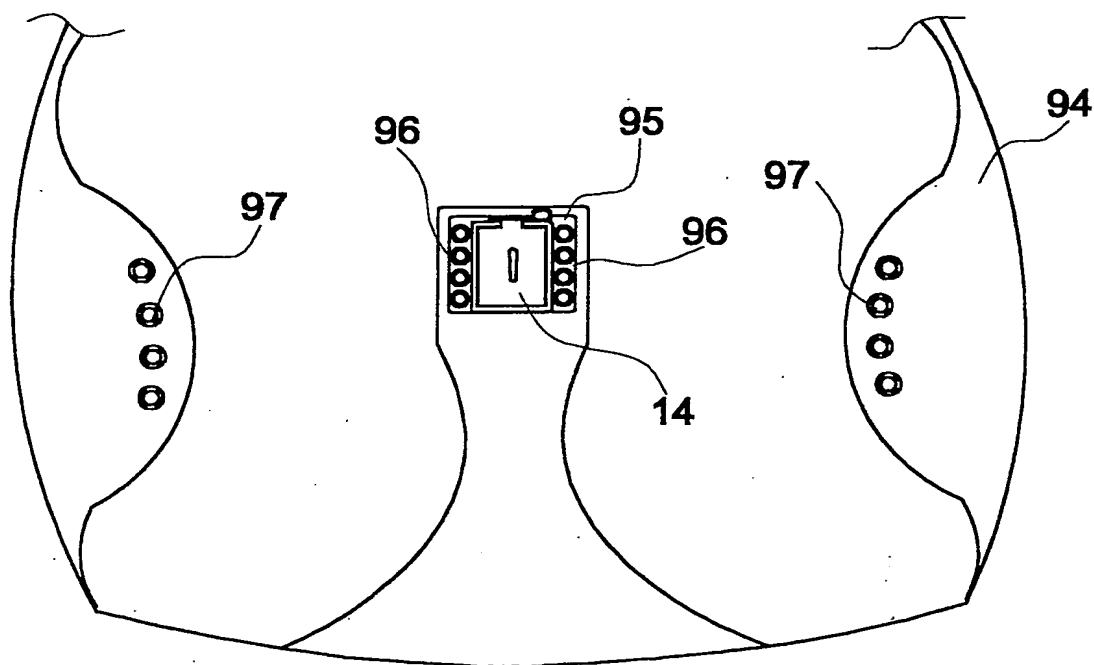


Fig.10

## INTERNATIONAL SEARCH REPORT

International Application No

P 03/10198

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B63B35/79

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B B63H F16B B64D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 345 172 A (CARN PATRICK) 21 October 1977 (1977-10-21) claims; figures	1,2,6,9, 10,12-14
A	DE 199 36 624 A (LASERTECHNIK RAEDISCH GMBH) 15 February 2001 (2001-02-15) abstract; figures	1,2,9, 10,13,14
A	US 3 034 596 A (TWAITS JR JOSEPH B) 15 May 1962 (1962-05-15) column 1, line 69 -column 3, line 21; figures	1-13
A	FR 2 521 519 A (TECH BUREAU REGAM) 19 August 1983 (1983-08-19) figures 6-8	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## ° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

3 February 2004

Date of mailing of the international search report

10/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Moya, E

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/10198

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2345172	A	21-10-1977	FR 2345172 A1	21-10-1977
			GB 1542205 A	14-03-1979
			NL 7703164 A	27-09-1977
			US 4112865 A	12-09-1978
DE 19936624	A	15-02-2001	DE 19936624 A1	15-02-2001
US 3034596	A	15-05-1962	NONE	
FR 2521519	A	19-08-1983	NL 8200658 A	16-09-1983
			BE 895855 A1	30-05-1983
			DE 3305291 A1	25-08-1983
			FR 2521519 A1	19-08-1983

## INTERNATIONAL SEARCH REPORT

Rec'd PCT/PTO 16 MAR 2005

PC 03/10198

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B63B35/79

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B B63H F16B B64D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 345 172 A (CARN PATRICK) 21 October 1977 (1977-10-21) claims; figures	1,2,6,9, 10,12-14
A	DE 199 36 624 A (LASERTECHNIK RAEDISCH GMBH) 15 February 2001 (2001-02-15) abstract; figures	1,2,9, 10,13,14
A	US 3 034 596 A (TWAITS JR JOSEPH B) 15 May 1962* (1962-05-15) column 1, line 69 -column 3, line 21; figures	1-13
A	FR 2 521 519 A (TECH BUREAU REGAM) 19 August 1983 (1983-08-19) figures 6-8	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.**\* Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 February 2004

Date of mailing of the international search report

10/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Moya, E

# INTERNATIONAL SEARCH REPORT

International Application No

PC: 03/10198

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2345172	A	21-10-1977	FR 2345172 A1	21-10-1977
			GB 1542205 A	14-03-1979
			NL 7703164 A	27-09-1977
			US 4112865 A	12-09-1978
DE 19936624	A	15-02-2001	DE 19936624 A1	15-02-2001
US 3034596	A	15-05-1962	NONE	
FR 2521519	A	19-08-1983	NL 8200658 A	16-09-1983
			BE 895855 A1	30-05-1983
			DE 3305291 A1	25-08-1983
			FR 2521519 A1	19-08-1983